


OUTRIGGER BANNERS


Quality Custom-Made



CUSTOM OUTRIGGER BANNERS
VELCRO DATE PANELS, AVENUE BANNERS,
PODIUM BANNERS, WALL BANNERS,
TABLE BANNERS,
PRAISE AND WORSHIP BANNERS
SASHES, ARMBANDS, TABLE FLAGS
HAND FLAGS, PILLOWS AND PRINTS
GOLF FLAGS, PENNANTS, BURGEES
SELF-STANDING BANNERS

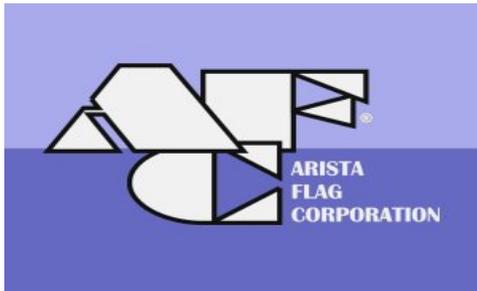

OUTRIGGER BANNER CONSTRUCTIONS

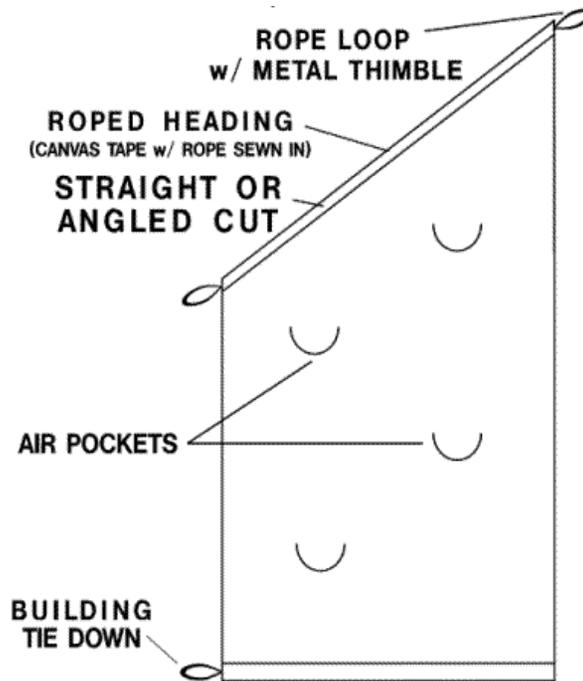

Outrigger banners are suspended from banner poles mounted on the face of a building.

A rectangular shape is appropriate for a pole parallel to the ground.

An angled cut along the top of the banner may be required if a pole is already in place.

Measure pole angle to determine the necessary corresponding banner angle.

COMMON SIZES

(OTHER CUSTOM SIZES AVAILABLE)
(sizes listed in feet)

4'x6'	5'x8'	5'x10'	6'x10'
6'x12'	8'x10'	8'x12'	10'x12'
10'x15'	10'x18'	12'x18'	

Fax Quotation Requests to:
845-246-7786
Email Quotation Requests to:
sales@aristaflag.com

AVAILABLE OPTIONS

Single-sided, Single-reverse,
Double-sided, Sand Pocket,
Air Pockets, Border around perimeter,
Pole Sleeves on top and bottom,
Back lining or Inner lining,
Roped Headings, Grommet Patch,
Non-tangle Rod with Patch




When submitting information for a quotation, please indicate **your name**, **the department you represent**, and **the name of your company**. Include your **fax number** and **phone number**. Please supply enough information for us to quote accurately. Always **include size**, **quantity**, **construction style**, **color notations**. Fax layout or drawing of all logos, images, typestyles, etc.

Detailed PDF Information Sheets for all products now available for download at www.aristaflag.com
Quality Custom-Made

CONSTRUCTION OPTIONS

Sand Pockets

are used to prevent a flag or banner from wrapping itself around an outrigger pole and to keep it hanging straight. Pockets are heavily reinforced with stitching and sewn closed at the top or left open with Velcro closures for those who wish to fill the sand pocket on-site.

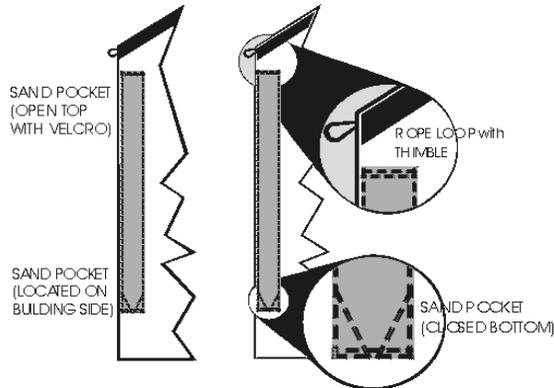

Non-Tangle Rod Patches

are used in conjunction with non-tangle rods to prevent a banner from wrapping around a pole.

Grommet Patches

are used as a tie-down point, connecting the banner to a point on the surface of a building.

Air Pockets

are reinforced, zig-zag stitched ports sewn through all layers of a banner and cut open to allow air flow through the banner when hung.

OUTRIGGER BANNERS MANUFACTURING METHODS

- Sewn and Appliquéd on Nylon Fabric
- Printed Dye-Sublimation on Polyester Fabric



VELCRO PANELS

Velcro panels are often used in conjunction with outrigger banners to convey dates or messages that may change with regard to specific events.



Send a [viewable file](#) of your logo for us to see. After reviewing the logo, we can make suggestions concerning materials and methods.
sales@aristaflag.com


ACCESSORIES

Non-Tangle Rods

Available in
2 1/2', 4', 6' and 7' lengths
Non-tangle rods prevent a flag or banner from wrapping around outrigger style poles. The bronze clamp is attached to the bottom of the flag or banner. The ring and hook attach to the halyard roping.



Homesteader 10' Outrigger Poles

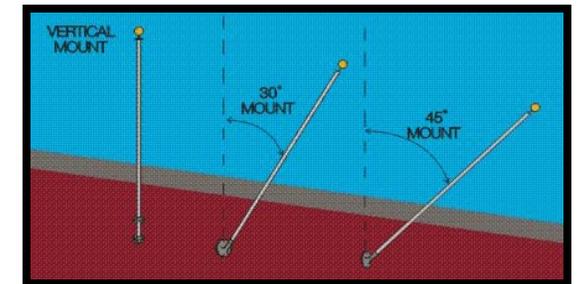

These high quality 10' outrigger poles can be mounted to display your flag or banner at a 30 or 45 degree angle. Vertical mounting is also possible.



Halyard Roping

Available in
50' and 100' lengths

Non-tangle rods, stock flags, halyard roping, outrigger poles and other accessories can be purchased online from our

Stockroom e-Flag Store.

Arista Flag Corporation

157 West Saugerties Road
Saugerties, New York 12477

Phone: 845-246-7700

Fax: 845-246-7786

Email: sales@aristaflag.com